


EN853 2SN/SAE100 R2AT

EB32-MSHA

2 Steel Wire Braid

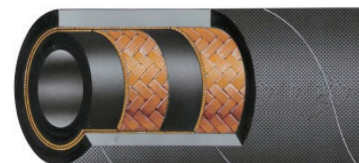

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 2 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER WITH FLAME RETARDANT.

APPLICATION : FOR MEDIUM-HIGH PRESSURE HYDRAULIC SYSTEMS IN INDUSTRY AND AGRICULTURE.

TEMPERATURE RANGE : -40°C~+100°C / -40°F~+212°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)	WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	max	bar	psi	bar	psi	mm	g/m	max/m
EB32-05	-03	3/16"	4.9	5.4	10.6	11.6	14.1	415	6018	1660	24070	90	320	50/100
EB32-06	-04	1/4"	6.4	7.0	12.1	13.3	15.7	400	5800	1600	23200	100	380	50/100
EB32-08	-05	5/16"	7.9	8.5	13.7	14.9	17.3	350	5075	1400	20300	115	450	50/100
EB32-10	-06	3/8"	9.5	10.1	16.1	17.3	19.7	330	4785	1320	19140	130	540	50/100
EB32-13	-08	1/2"	12.7	13.5	19.0	20.6	23.0	275	3988	1100	15950	180	680	50/100
EB32-16	-10	5/8"	15.8	16.7	22.2	23.8	26.2	250	3625	1000	14500	200	600	50/100
EB32-19	-12	3/4"	18.8	19.8	26.2	27.8	30.1	215	3118	860	12470	240	940	50/100
EB32-25	-16	1"	25.4	26.4	34.1	35.7	38.9	165	2393	660	9570	300	1350	50/100
EB32-32	-20	1 1/4"	31.8	33.0	43.3	45.7	49.5	125	1813	500	7250	420	2150	20/40
EB32-38	-24	1 1/2"	38.1	39.3	49.6	52.0	55.9	90	1305	360	5220	500	2650	20/40
EB32-51	-32	2"	50.6	52.0	62.3	64.7	68.6	80	1160	320	4640	630	3420	20/40

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

NORMS	DIN EN853 SAEJ517	COLOUR	   
			BLACK BLUE RED GRAY