SAND BLAST HOSE HB09

1 Steel Wire Braid

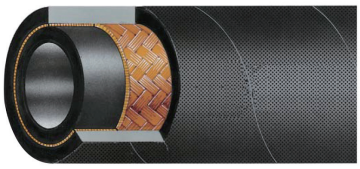

TUBE : SUPER HIGH ABRASION RESISTANT SYNTHETIC RUBBER.

REINFORCEMENT : 1 HIGH TENSILE STEEL WIRE BRAID.

COVER : OIL ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : FOR DELIVERY OF METAL SURFACE RUST REMOVALBY WIND PRESSURE ,SANDING,WET OR DRY SAND BLASTING,ALSO CONVEYING WATER.

TEMPERATURE RANGE : -40°C～+100°C / -40°F～+212°F

TYPE	SIZE		ID	OD	WP		BP		W	L
	Dash Size	inch	mm	mm	bar	psi	bar	psi	g/m	max/m
HB09-1301	-8	1/2	13	27.0	10	145	30	450	580	50/100
HB09-1901	-12	3/4	19	33.0	10	145	30	450	760	50/100
HB09-2501	-16	1	25	40.0	10	145	30	450	1010	50/100
HB09-3201	-20	1-1/4	32	48.0	10	145	30	450	1690	20/40
HB09-3801	-24	1-1/2	38	55.0	10	145	30	450	2020	20/40
HB09-5101	-32	2	51	71.0	10	145	30	450	3640	20/40
HB09-6401	-40	2-1/2	64	84.0	10	145	30	450	4650	20/40
HB09-7601	-48	3	76	96.0	10	145	30	450	5170	20/40
HB09-8901	-56	3-1/2	89	110.0	10	145	30	450	6370	20/40

OPTIONS

MSHA

MARKING/TRANSFER TAPE,EMBOSSED OR INK JET

NORMS		COLOUR	BLACK