


SUPER FLEXIBLE HYDRAULIC HOSE

SS04

UP TO 0.4M IMPULSE
4 Steel Wire Spiral

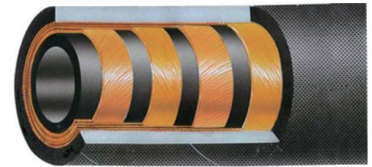

TUBE : MINERAL, VEGETABLE AND HYDRAULIC OIL RESISTANT SPECIAL SYNTHETIC RUBBER.

REINFORCEMENT : 4 HIGH TENSILE STEEL SPIRAL.

COVER : HYDRAULIC OIL, ABRASION AND WEATHER RESISTANT SPECIAL SYNTHETIC RUBBER.

APPLICATION : SUPER FLEXIBLE AND HIGH IMPULSE PERFORMANCE TO REPLACE EN853 STANDARD HOSE.

TEMPERATURE RANGE : -40°C~+121°C / -40°F~+248°F

TYPE	SIZE		ID (mm)		ROD (mm)		OD (mm)		WP		BP		BR/r	W	L
	Dash Size	inch	min	max	min	max	min	max	bar	psi	bar	psi	mm	g/m	max/m
SS04-604SK	-4	1/4	6.4	6.8	12.2	13.2	14.4	15.4	450	6525	1800	26100	45	440	20/40
SS04-804SK	-5	5/16	8.0	8.5	13.8	14.8	15.9	16.9	430	6235	1720	24940	50	490	20/40
SS04-1004SK	-6	3/8	9.5	9.9	16.2	17.2	18.2	19.2	420	6090	1680	24360	55	590	20/40
SS04-1304SK	-8	1/2	12.7	13.3	19.3	20.3	21.3	22.3	350	5075	1400	20300	60	710	20/40
SS04-1604SK	-10	5/8	15.8	16.4	22.4	23.6	24.5	25.7	300	4350	1200	17400	80	850	20/40
SS04-1904SK	-12	3/4	19.0	19.6	26.0	27.0	28.0	29.0	280	4060	1120	16240	110	1140	20/40
SS04-2504SK	-16	1	25.0	25.6	33.4	34.4	35.6	36.6	280	4060	1120	14500	150	1390	20/40
SS04-3204SK	-20	1-1/4	31.6	32.4	43.2	44.4	45.8	47.0	220	3190	880	12760	190	2150	20/40
SS04-3804SK	-24	1-1/2	37.7	38.5	49.5	50.7	52.5	53.7	200	2900	800	11600	250	2520	20/40
SS04-5104SK	-32	2	50.6	51.5	62.1	63.7	65.1	66.7	200	2900	800	11600	300	3490	20/40

OPTIONS



MSHA

MARKING/TRANSFER TAPE,EMBOSSSED OR INK JET

NORMS	EXCEED EN853	COLOUR	 BLACK
-------	--------------	--------	--