


SEWERJET HOSE

4 Textile Spiral

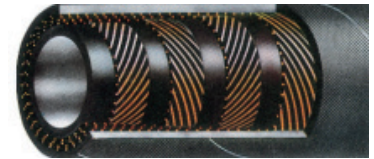

TUBE : OIL, DETERGENTS AND HOT WATER RESISTANT SYNTHETIC RUBBER.
 REINFORCEMENT : 4 HIGH TENSILE SYNTHETIC TEXTILE SPIRAL.
 COVER : SMOOTH, ABRASION, OZONE RESISTANCE BLACK SYNTHETIC RUBBER.
 APPLICATION : SEWER JETTING AND HEAVY DUTY, HIGH PRESSURE WATER CLEANING AND EXTREMELY FLEXIBLE.
 TEMPERATURE RANGE : -30 °C +80 °C (-22 °F +176 °F)

TYPE	SIZE		 ID (mm)		 OD (mm)	 WP		 BP		 BR/r	 W	 L
	Dash Size	inch	min	max	max	bar	psi	bar	psi	mm	g/m	max/m
SJ-13	-8	1/2	12.8	13.3	25.5	250	3625	625	9063	70	0.32	120
SJ-16	-10	5/8	15.8	16.3	28.5	250	3625	625	9063	80	0.40	120
SJ-19	-12	3/4	18.9	19.3	31.5	250	3625	625	9063	90	0.47	120
SJ-22	-14	7/8	21.9	22.3	35.0	250	3625	625	9063	95	0.56	120
SJ-25	-16	1	25.0	25.8	39.0	250	3625	625	9063	100	0.65	120
SJ-32	-20	1-1/4	31.8	32.5	47.5	250	3625	625	9063	130	0.90	120



MARKING/TRANSFER TAPE, EMBOSSED OR INK JET



SEWERJET (**)(DN**mm) W.P.**BAR/**PSI *Q/****(YEAR)

NORMS		COLOUR	 BLACK
-------	--	--------	--